

Making The World Safer

Senken Group Co.,Ltd.

Add:160,West Yuele Street,Wenzhou China 325029
Tel:+86-577-88090011,88090022,88098255
Fax:+86-577-88098159
Email:export@senken.com.cn
Version:900518035B



facebook




Linked in



YouTube



SENKEN

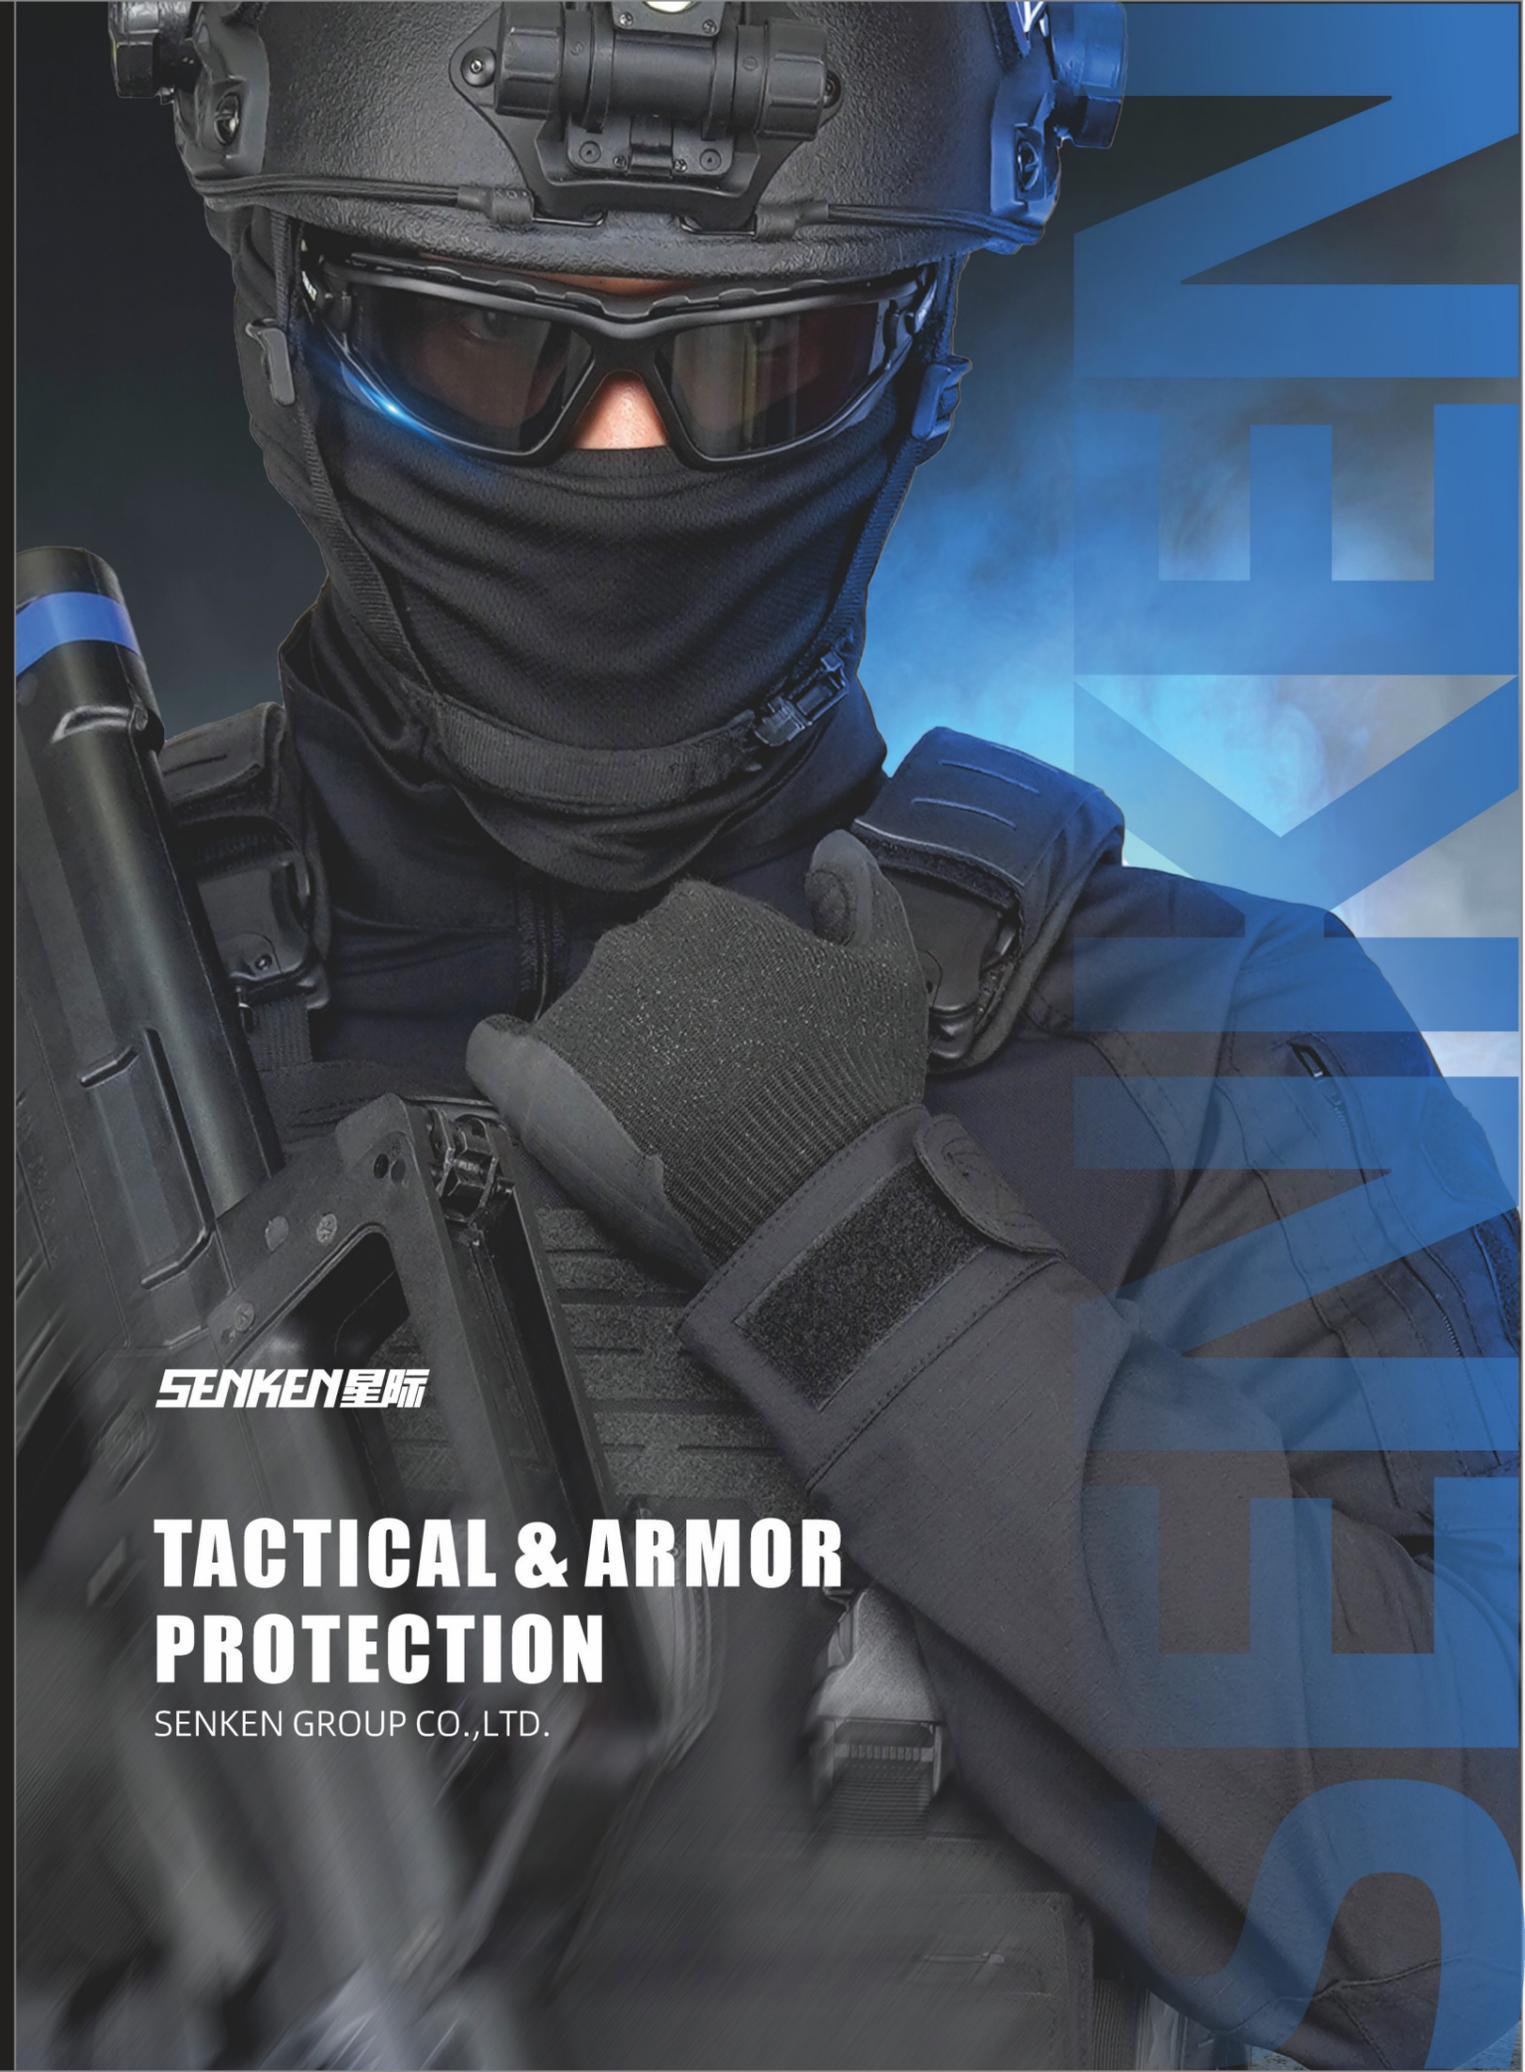

SENKEN 星际

**TACTICAL & ARMOR
PROTECTION**

SENKEN GROUP CO.,LTD.



Bullet-Proof Vest
FDY3R-XJ02





Bullet-Proof Vest

FDY3R-XJ28B



Stab-resistant Vest

FCF-FB-SK01



Stab Resistant Vest
FCF-JA-SK21



Stab Resistant Vest
FCF-JA-XJ05

CATALOG LOG UE

SENKEN 星盾

01 Bullet Proof Series

13 Anti-Riot Series

22 Safe Defense Series

30 Tactical Protect Series

47 Security Check Series

Bullet Proof Series



Bullet Proof Vest

Bullet Proof Helmet

Bullet Proof Shield

Bullet Proof Plate

Proof

Bullet-Proof Vest FDY2R-XJ27

Usage: Designed for police, military, etc.


Bulletproof material: Aramid UD/UHMWPE UD

Standard: NIJ 0101.06 IIIA/GOST 34286-2017 BR1/

Protection can be upgraded to III/IV/BR4/BR5 as required

Features:

- Components: front chest, back, neck, arm, groin protection parts;
- 600D Oxford cloth waterproof coating fabric;
- Using MOLLE webbing system
- Front and rear built-in insert pocket, can accommodate 250*300 hard insert board;
- With adjustable shoulder strap;
- The interior is designed with mesh cloth, which can effectively dissipate heat to keep the wearer cool and comfortable;
- Ergonomic design;
- Protection area: ≥ 0.50 square meters;

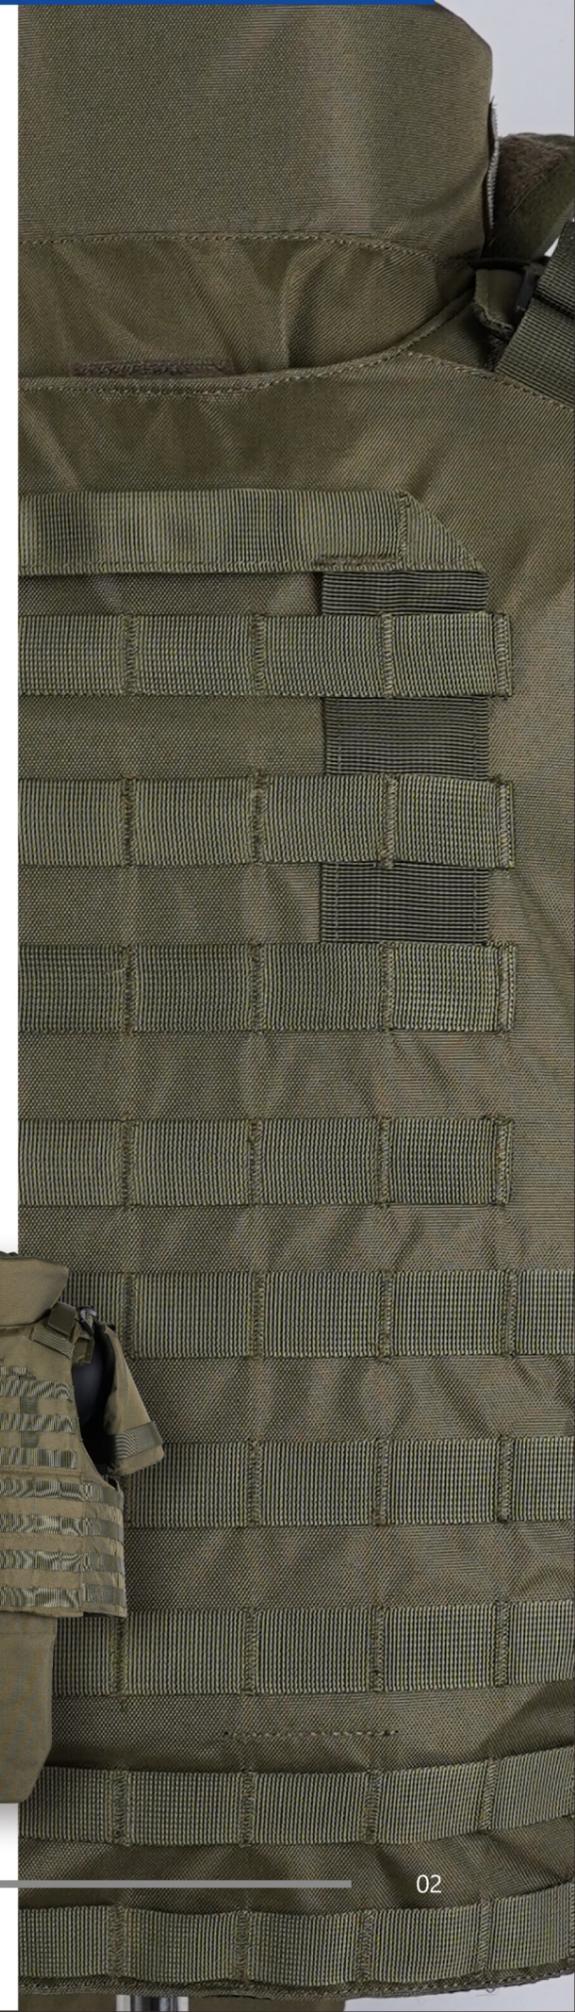



Bullet-Proof Vest FDY3R-XJ02

Usage: Designed for police, military, etc.
Bulletproof material: Aramid UD/UHMWPE UD
Standard: NIJ 0101.06 IIIA/GOST 34286-2017 BR1/
Protection can be upgraded to III/IV/BR4/BR5 as required

Features:

- Composition: front chest, back, waist protection parts;
- 500 Cordura nylon waterproof coating fabric;
- Using laser cutting MOLLE system;
- Front and rear built-in insert pocket, can accommodate 250*300 hard insert board;
- With adjustable shoulder strap;
- The vest adopts one-button quick disassembly design, which can quickly release the shoulder and waist quick disassembly. There is a buckle on both sides of the shoulder and waist of the body armor, and the four buckle can be controlled by one button to achieve instant quick disassembly at the same time.
- The shoulder, front chest and back are designed with vacuum air cushion, and the bearing part is directly in contact with the convection air bag through the gas buffer effect, which has the seismic effect
- Ergonomic design;
- Protection area: ≥ 0.18 square meters;



Bullet-Proof Vest FDY3R-XJ28

- Execution standard: GA141-2010 《Police Bulletproof》
- Color: Black
- Vest material: 500D Cordura, fire -resistant flame retardant, abrasion -resistant tear, waterproof and oil -resistant
- Bulletproof layer material: made of high - performance polyethylene material
- Bulletproof level: Level IIIA
- Protective area: $\geq 0.14\text{m}^2$
- Bulletproof layer weight: $\leq 0.9\text{KG}$ (conclude protective cover)
- Overall weight: $\leq 2.15\text{KG}$
- Softness: Medium



Bullet-Proof Helmet



FDK2F-SK02-L

Material	KEVLAR/Aramid	PE
Ballistic Level	NIJ IIIA	NIJ IIIA
Protective Area	0.12m ²	0.12m ²
Weight	≤1.45kg	≤1.48kg
NIJ 0101.06	9mm/.44	9mm/.44

Bullet-Proof Helmet



FDD3F-SK01-M88

Material	KEVLAR/Aramid	PE
Ballistic Level	NIJ IIIA	NIJ IIIA
Protective Area	0.12m ²	0.12m ²
Weight	≤1.40kg	≤1.43kg
NIJ 0101.06	9mm/.44	9mm/.44



FDK2F-SK03-FAST

Material	KEVLAR/Aramid	PE
Ballistic Level	NIJ IIIA	NIJ IIIA
Protective Area	0.12m ²	0.12m ²
Weight	≤1.40kg	≤1.43kg
NIJ 0101.06	9mm/.44	9mm/.44



FDK2F-SK03-L MICH

Material	KEVLAR/Aramid
Ballistic Level	NIJ IIIA
Protective Area	0.12m ²
Weight	≤1.55kg
NIJ 0101.06	9mm/.44



FDK2F-SK03-M88

Material	KEVLAR/Aramid	PE
Ballistic Level	NIJ IIIA	NIJ IIIA
Protective Area	0.12m ²	0.12m ²
Weight	≤1.45kg	≤1.48kg
NIJ 0101.06	9mm/.44	9mm/.44



FDMZ-SK01

Material	PC
Ballistic Level	NIJ IIIA
Protective Area	0.05m ²
Weight	≤1.5kg
NIJ 0101.06	.44

Bullet-Proof Vest FDY3R-SK07A

Color	Black
Vest Material	500D Cordura, fire-resistant, abrasion-resistant, tear-resistant, water-resistant, oil-resistant
Bulletproof Layer Material	High-performance polyethylene
Bulletproof Level	GA3
Protective Area	≥0.15m²
Bulletproof Layer Weight	≤1.0kg (including protective cover)
Bulletproof Layer Thickness	≤8mm
Overall Weight	≤2.4kg
Flexibility	Moderate



Bullet-Proof Vest FDY3R-XJ09

Usage: Designed for police, military, etc.
Bulletproof material: Aramid UD/UHMWPE UD
Standard: NIJ 0101.06 IIIA/Protection can be upgraded to III/IV as required

Features:
 Components: front chest, back, neck, arm, groin protection parts;900D Oxford cloth waterproof coating fabric;Using MOLLE webbing systemFront and rear built-in insert pocket, can accommodate 250*300 hard insert board;With adjustable shoulder strap;Ergonomic design;Front chest with detachable single point strap;Protection area: ≥0.50 square meters;



Bullet-Proof Vest



FDY2R-XJ02



FDY2R-XJ03



FDY2R-XJ09



FDY2R-XJ30



FDY2R-XJ31



FDY2R-XJ36



Bullet-Proof Shield

Material	Silicon carbide ceramic + ultra-high molecular weight polyethylene
Dimensions	Armor plate: 500×800mm±5mm
Removable armor skirt	500×350mm±5mm
Weight	21±1.5kg (without removable armor plate, unloading system, wheelbase and LED lights)
Weight of removable armor plate	0.9±0.1 kg
External coating	polyurea
LED	LED/lighting system
Protection level	GOST 34286-2017 Br 5
Bullet stop	Product protection structure: 7.62*54 SVD
Bulletproof vest in bulletproof glass area	7.62*39 AKM, active armor skirt protection structure: 9mm APS



Bullet-Proof Shield FDP5JL-SK05

Material	4.5mm thick steel plate
Observation window	≥160mm*55mm
Transmittance	≥72%
Protective area	≥0.66m²
Weight	≤28Kg
Ballistic Level	NIJ III (level III+)(7.62X39 MSC)



Bullet-Proof Shield FDP4JS-SK01

Material	2.8mm thick steel plate
Ballistic Level	NIJ IIIA (Optional)
Observation	≤160mm*55mm
Transmittance	≥79%
Protective Area	≥0.26m²
Weight	≤6Kg



Bullet-Proof Shield FDP3FS-SK01

Material	High-performance polyethylene
Ballistic Level	NIJ IIIA
Thickness	≤8mm
Observation Window	≥160mm*55mm
Transmittance	≥79%
Protective Area	≥0.45m ²
Weight	≤5.6Kg



Others



Bullet Proof Plate



Level	Material	Weight (kg)	Protection area (mm)	Thickness (mm)
NIJ III++ STA	SIC+UHMWPE	1.75±0.05	200*250	20±2
NIJ III STA				
NIJ III ICW IIIA.44	SIC+UHMWPE	1.55±0.05	200*250	14±2
NIJ III ICW IIIA.44	AL2O3+UHMWPE	1.8±0.05	200*250	14±2
NIJ III STA	AL2O3+UHMWPE	2±0.1	200*250	20±2
NIJ IV ICW IIIA.44	AL2O3+UHMWPE	2.55±0.1	200*250	18±2
NIJ IV STA	AL2O3+UHMWPE	2.65±0.1	200*250	20±2
NIJ IV ICW IIIA.44	SIC+UHMWPE	2.15±0.1	200*250	18±2
NIJ IV STA	SIC+UHMWPE	2.3±0.1	200*250	20±2

Anti-Riot



Anti-Riot Suit

Anti-Riot Helmet

Anti-Riot Shield



Quick-Wear Anti-Riot Suit FBF-B-SK10



Anti-stab performance	The front chest and back resist 20J puncture, and the tip of the knife does not penetrate.
Impact resistance	With 120J impact, the protective layer will not be damaged or cracked.
Impact energy absorption performance	The front chest and back impact the protective layer with 100J kinetic energy, and the cement indentation is 15.9mm
Protection area(m ²)	Front chest and front file>0.06 Back>0.06 Upper limbs (including shoulders and elbows)>0.14 Lower limbs>0.26
Flame retardant performance	The afterburning time after the surface of the protective part burns is less than 10 seconds.
Adapt to ambient temperature	-20°C+55°C
Structural connection strength	Buckle strength>500N The fastening strength of Velcro>7.0N/cm ² The strength of the connecting belt>2000N
Weight	5.8kg



Anti-Riot Suit FBF-B-SK06

Item	Specifications
Size	One Size (163cm~188cm)
Material	Plastic Polyamide&Non-flammable Fabrics
Stab-resistant properties	42J stab-resistant no penetration (Front chest&Back side)
Impact resistance	168J Impact resistant, no damage or crack
Strike energy absorption performance	100J Impact resistant (Front chest & back side); and the indentation depth of the cement is ≤16mm.
Standard Reference	<GA420-2008> (Std.of Police Anti-Riot Suit) <GA141-2010> (Std.of Police Bulletproof Body Armor)
Flame retardant	Compliance with flame retardant grade V-2
Working temperature	-20°C~+55°C
Strength of structural junctions	Buckle strength:≥500N Velcro strength:≥7.0N/cm2 Connecting belt Strength:≥2000N
Weight	≤7.6kg(6.3kg without bulletproof)



Body Guard



Waist / Thigh Guard



Arm / Elbow / Shoulder Guard



Leg / Shin Guard

Quick-Wear Parts

Anti-Riot Suit FBF-B-SK05

The suit is lightweight without aluminium plate and ranked highest in ease of getting into or out, Especially it is provided with high ventilated.

The hook and loop fastener modular flex design allows all shapes and size to fit comfortably without sacrificing much needed mobility Most base layers inside of the outer shell are removeable and washable

The entire kit comes with its own suitcase with padded shoulder straps for storage and transport

- Place of Origin:CN
- Model Number:FBF-B-SK05
- Brand Name:Senken
- Color:Black or other
- Material:PC ,Nylon ,EVA foam
- Net weight:7.0Kg
- Protection Area:Body and Shoulder ,Forearm
- Factory Style:OEM service
- Standard:GA420-2008



Body Guard



Arm Guard



Leg / Shin Guard



Waist / Thigh Guard

Anti-Riot Suit FBF-C-XJ02

- The protective parts of the anti-riot protective suit are designed with the shape, which is suitable for the corresponding parts of the human body. Modular and combined design of the protection body, convenient and reliable connection and separation of each protection component;
- Hollow structure design of the front chest and limbs, and the corresponding hollow place on the inside of each part should have a structure to prevent liquid splashing into; Protective layer and buffer layer hollow cushioning structure (excluding back);
- Knee and elbow joint design;
- Waist design hard standard carrying interface;
- Design a hidden one-key quick-release mechanism that can be operated with one hand;
- The elastic belt is a replaceable structure;
- The front chest and back protection parts are lined with a cache layer and a removable thermal conductivity layer;
- Carrying bag: can store anti-riot protective clothing, structural design to meet the shoulder or single hand;
- Material: The main material is anti-aging modified PC; Raw materials are non-toxic, no irritating odor;
- Area: front chest $\geq 1100\text{cm}^2$, crotch $\geq 400\text{cm}^2$, back $\geq 1100\text{cm}^2$, upper limb $\geq 2300\text{cm}^2$, lower limb $\geq 4300\text{cm}^2$;
- Weight: $\leq 6.5\text{kg}$;
- Impact resistance: any protective parts to withstand 120J kinetic energy impact, no damage, cracking;
- Energy absorption performance The front chest and back impact the protective layer with 100J kinetic energy, and the indentation depth of the front chest mud is $\leq 5.2\text{mm}$; Back cement indentation depth: $\leq 6.8\text{mm}$;
- Puncture resistance: Puncture the front chest, back and crotch with $24\text{J} \pm 0.5\text{J}$ impact energy using the application D1 tool prescribed by GA68-2019, and the test body.
- Wear off time: wear off time is not more than 90S;
- Environmental adaptability to low temperature: Keep the anti-riot suit at an ambient temperature of $-30^\circ\text{C} \pm 2^\circ\text{C}$ for 4h, which should meet the requirements of impact resistance; High temperature: Keep the anti-riot suit at an ambient temperature of $+55^\circ\text{C} \pm 2^\circ\text{C}$ for 4h, which should meet the requirements of anti-stabbing performance;
- Any protective parts have anti-loose and anti-falling design;



Riot Helmet FBK-AL-XJ01

Modular design: Comes with detachable neck protection components, compatible with tactical accessories.



Composition	Riot helmet consists of shell, buffer layer, liner, face shield, wearing device (including strap, chin rest, fastener, top suspension system), neck guard, and tactical navigation module.
Weight	(Without neck guard): $\leq 0.98\text{kg}$; (Without face shield & neck guard): $\leq 0.75\text{kg}$; Detachable neck guard: $\leq 0.188\text{kg}$.
Shell	No sharp protrusions exceeding 3mm in height on the inner surface of the shell.
Buffer layer	Equipped with impact-energy-absorbing buffer layer, fully fitting the inner shell surface, with air guide groove design.
Wearing device	Strap width $15\text{mm} \pm 2\text{mm}$; strap elongation $< 25\text{mm}$; emergency release fastener activation force $\leq 887.53\text{N}$; heat dissipation time $\leq 9\text{min}$.
Neck guard	Made of soft cut-resistant and flame-retardant material, firmly connected to the shell; external dimensions comply with Appendix A.
Tactical navigation	External & fitting dimensions comply with Appendix A; accessories within rated load range are securely mounted and easy to assemble/disassemble.
Impact resistance	Withstands 4.9J impact on the face shield; after impact, the shield does not contact the test headform's nose, and the shield opens/closes normally.
Bullet impact resistance (for face shield)	Withstands 1g lead bullet impact at $150\text{m/s} \pm 10\text{m/s}$; the shield is not penetrated or broken.
Impact energy absorption	After normal/low/high temperature & rain tests (water spray), withstands 49J impact; force transmitted to test headform $< 4000\text{N}$, and the shell remains intact.
Penetration resistance	Withstands 88.2J penetration; the projectile does not penetrate or contact the test headform.
Cut resistance	Neck guard's cut resistance meets Class 3 under normal/high/low temperature conditions.

Anti-Riot Helmet

FBK-SK01-L



- Material: shell-engineering plastics, buffer layer -foam, Mask -PC
- Structure: shell, buffer layer, gasket (can be disassembled and washed), visor wearing device, neck protection, etc.
- Color: Black or customized
- Transmittance of visor: Transmittance $\geq 88.3\%$
- Optical distortion of visor: maximum 4'
- Weight: $\leq 1.58\text{kg}$
- Standard: GA294-2012 "Police riot Helmets"

FBK-09



- Material: ABS+PC
- Lens material: PC
- Specification: S: 540 ~ 560, M: 560 ~ 580, L: 580 ~ 600
- Color: Black
- Weight: $\leq 1.4\text{kg}$
- Structure: Shell, buffer layer, visor, wearing device, neck protection, etc.
- Lens: 3mm/2mm euro lens
- Standard: GA294-2012 "Police riot Helmets"

FBK-12-N



- Material: ABS+PC
- Lens material: PC
- Size: S: 540 ~ 560, M: 560 ~ 580, L: 580 ~ 600
- Color: matte black
- Structure: Shell, buffer layer, visor, wearing device, neck protection, etc.
- Weight: $\leq 1.7\text{kg}$
- Standard: GA294-2001 "Police riot Helmets"

Anti-Riot Shield



GFBD-B-SK01

color	silver
Material	Aluminum alloy 5052
gear rack	high strength steel
Size	380mmx160mmx80mm
arm strip	waterproof, anti-aging, resistant to fire
Application	Government
Type	Tactical
Feature	High Strength
thickness	3.5mm
weight	450g/pcs



FBD-BL-SK03



FKHB-SK06

Anti-Riot Shield



FBP-TL-SK-01

Material	PC
Thickness	3.5mm
Size	900*500mm
Protective Area	≥0.45m²
Weight	≤2.38kg
Transmittance	≥89.4%
Standard	GA 422-2008 "Police riot Shield"



FBP-TL-SK-06

Material	PC
Thickness	3.5mm
Size	1000*560mm
Protective Area	≥0.5m²
Weight	≤3.75kg
Transmittance	≥87%
Standard	GA 422-2008 "Police riot Shield"



FBP-TS-SK-07

Material	PC
Size	580*580*3.5mm
Weight	1.60kg
Transmittance	84%
Standard	GA 422-2008 "Police riot Shield"



Combined Riot Shield FBP-TL-SK08A/B



Introduction:

The structure of the combined riot shield consists of a shield body, an anti-chopping strip, a cushion pad, a handle, an arm fixing device, etc. This product is suitable for soldiers of the People's Liberation Army, armed police, and special forces to resist attacks from assailants with wooden (iron) sticks, bricks, glass bottles during missions. The handle made of metal material combined with plastic is firmly installed, and the double handle structure is convenient to operate and has strong applicability. A stainless steel anti-chopping strip is installed on the upper edge of the shield body, making it an excellent protective equipment for law enforcement personnel.

Features:

Two pieces of combined shields can be combined left and right, and upper and lower combination together as a whole. Multiple combined shields can be connected together using the semi-circular grooves on both sides of the shield to form a shield wall. Each set of combined shields is operated simultaneously by two people, one in front and one behind, and can quickly form a shield wall in actual combat. It can also be quickly dispersed and fight alone, flexible and mobile, effectively protecting the personal safety of users in large-scale group events.

Parameters:

- Execution Standard: GA422-2019 Riot Shield for Police Use
- Shield Material: High-quality PC material, metal edging is added to the top of the shield for reinforcement
- Shield Thickness: 4mm
- Shield Size: Large: Height 21600mm; Width 555mm+3mm
- Small: Height 1200mm; Width 555mm+3mm
- Light Transmittance: ≥87.2%
- Weight: ≤7kg(08A), ≤5kg(08B)

Safe Defense Series



Police Belt

Hand Cuffs

Baton

Reflective Vest

Mounted Police Equipment

Police Belt YD-H-XJ01

- Injection molding using nylon modified materials;
- Good environmental adaptability and can work reliably in the environment of -30°C to 40°C;
- Good chemical resistance, and it will not be softened, discolored or deformed when it meets oil, acid, alkali and other chemical substances;
- Good aging resistance, and the material has no fading, cracking or brittle fracture within 3 years under natural environment.
- Weight: about 600g (not including belt buckle or leg covers)
- Length: 138mm
- Width: 82mm
- Thickness: 41mm



- | | |
|--|--|
|  <p>① Tear gas spray quick-draw holster</p> |  <p>② Handcuff quick-draw holster</p> |
|  <p>③ Expandable baton quick-draw holster</p> |  <p>④ Tear gas spray quick-draw holster</p> |

Police Belt

YHXJ



- Material: Nylon
- Size: 1100mm-1500mm
- Color: Black
- The main belt shall be composed of belt drill rod, the belt, belt hoop, nylon woven belt, nylon buckle, PE or PP material. The belt drill rod is in insert buckle structure, covered zinc alloy. Belt drill rod is matt silver white (nickel plating)
- Standard equipment: outer belt, inner belt, slant belt, basic type baton sheath, flashlight sheath, police work bag, handcuff cover, tear sprayer cover, interphone cover
- Weight: ≤1.2kg

Duty Belt

Y-SK-N14



Y-SK-01-H



Model	Y-SK-N14	Y-SK-01-H
Material	Nylon	Nylon
Dimension(mm)	1100mm-1500mm	1100mm-1500mm
Weight	≤1.5kg	≤1.3kg

Handcuffs

K1-SK01



- Material: Titanium alloy
- Weight: 240g
- Length: 235mm
- Lock point: 21
- Min. opening: 55mm
- Diameter of ring: 55-85mm

SK160C



- Weight (g): 195 (excluding keys)
- Minimum opening size (H): 55mm
- Ring diameter size (B): 50-80mm
- Total length: 235mm
- Shackle: 21 (double-row teeth)
- Material: Aluminum alloy (6061-T6)

SK180-02



- Material: carbon steel
- Loop diameters: 50-76mm
- Total length: 230mm
- Weight: 280g
- Minimum diameter: 51mm
- Handcuff with holster

SK200-03



- Material: carbon steel & nickel plated
- Min. Diameter: 5.0cm
- Max. Diameter: 7.8cm
- Two handcuff keys included
- Weight: 310g
- This item is specially designed not to be opened except by designated key because of its small hole.
- Silicon-Coating for preventing self-injury and With qualified holster optional

Handcuffs

SK120



- Weight: 375g±5g
- Minimum opening dimension: 51mm
- Diameter dimension of ring: 38mm-76mm
- Full length: 200mm
- Handuff point: 21
- material: carbonized steel

SK125



- Weight: 340g±5g
- Minimum opening dimension: 55mm
- Diameter dimension of ring: 48mm-80mm
- Full length: 204mm
- Handuff point: 21
- material: carbonized steel

SK160A



- Weight: 300g±5g
- Minimum opening dimension: 57mm
- Diameter dimension of ring: 45mm-78mm
- Full length: 240mm
- Handuff point: 19
- material: carbonized steel

SK150-XJ-02



- Weight: 280g±5g
- Minimum opening dimension: 51mm
- Diameter dimension of ring: 41mm-75mm
- Full length: 238mm±2mm
- Handuff point: 19
- material: carbonized steel

SK160-B-S



- Weight: 410g±5g
- Minimum opening dimension: 57mm
- Diameter dimension of ring: 48mm-78mm
- Full length: 235mm
- Handuff point: 19
- material: carbonized steel

Shackles

SKJL-A

- Total weight: 2000g
- Material: carbonized steel



Handcuff parameters:

- Weight: 395g
- Minimum opening dimension: 54mm
- Ring diameter size: 47mm-80mm
- Total length: 297mm
- Cuff point: 19

Shackle parameters:

- Weight: 1300g
- Center distance: 500mm
- Ring diameter size: 80mm
- Total length: 650mm
- The middle connection chain length: 700±10mm

SKJL-G



- Total weight: 3236g±10g (excluding key)
- Material: Q235 precision casting

Handcuff parameters:

- Weight: 507±5 grams
- Minimum opening dimension: 56mm
- Ring diameter: 56mm-78mm
- Center distance: 205mm
- Total length: 285mm
- Cuff point: 4

Shackle parameters:

- Weight: 2500g±50g
- Center distance: 600±10mm
- The minimum open size: 85mm
- Ring diameter adjustable size: 80/85/88/95mm
- Total length: 760±10mm
- The middle connection chain length: 700±10mm

SKJL-B-A



- Weight: 1018g±10g (excluding key)
- Material: carbonized steel

Handcuff parameters:

- Weight: 291g±5g
- Minimum opening dimension: 54mm
- Ring diameter size: 46mm-78mm
- Total length: 248mm
- Cuff point: 18

Shackle parameters:

- Weight: 507g±5g
- Minimum opening dimension: 52mm
- Ring diameter size: 51mm-92mm
- Total length: 795mm
- Cuff point: 23
- The middle connection chain length: 700±50mm

Baton

New telescopic baton G2-SK



- Components: grip, middle tube, front tube, tail cover, unlock button
- Size: Length of contraction: 225mm±2mm
Length extension: 510mm
Grip: 26.5mm, middle tube: 20.5mm, front tube: 16mm
- Weight: ≤320g
- Tensile strength: 2000N
- Retractable performance: Fully extended and locked telescope baton should be fully retractable under axial impact of 1.96J
- Expansion reliability: cycle ≥3000 times
- Corrosion resistance: No less than grade 9
- Bending resistance: After hanging the weight of 10kg, the stretchable baton should be used normally and meet the requirements of scalability, with residual deformation ≤3.0mm
- Standard: GA 886-2010 “telescopic batons of police equipment”

JG-850-SK03



- Material: fiber core + rubber
- Length: 850mm
- Diameter: 25mm
- Weight: 0.6Kg

JG-510-SK01



- Material: Spring steel wire + rubber
- Length: 480mm/510mm
- Tensile strength : 7Mpa
- Elongation at break: ≥250%
- Service life: ≥5000 times

PCT-SK01




- Model Number: GJT-SK01
- Structural design: high hardness aluminum alloy processing composition, with tungsten steel broken window head.
- Window breaking function: It can break tempered glass ≤30mm
- Overall shape size: height: 58mm, maximum diameter 39mm
- Hardness of broken window head: HRC60

JG-600-SK01



- Material: PC
- Total Length: 603mm
- Grip length: 160mm
- T side length: 150mm
- Diameter: Φ31.4mm
- Color: Black

Baton

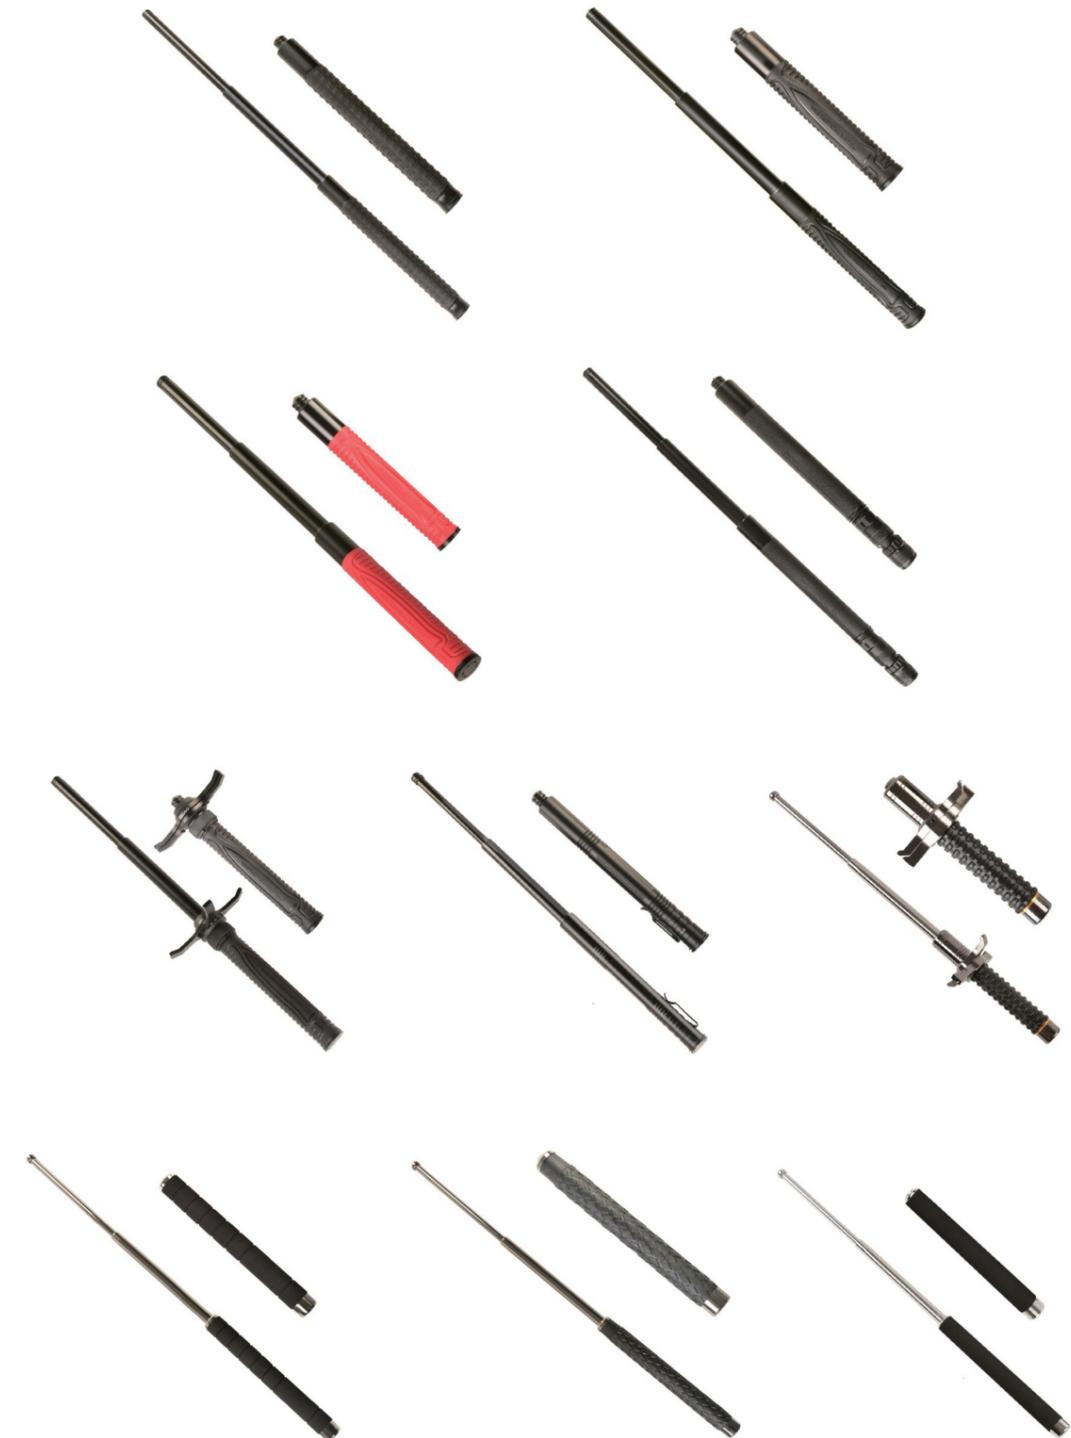

Tactical Protect Series



Tactical Vest

Tactical Bag

Stab Resistant Vest

Cut Resistant Equipment

Gas Mask

Mounted Police Equipment

RIDING SPORTSWEAR



The motorcycle safety airbag suit (without neck protection) is a new product independently developed by our company. Its main function is to use a high-pressure cylinder as the inflation source. When the rider separates from the motorcycle in an accident, the airbag instantly inflates to provide protection against falls, collisions, and other injuries.

- Top Fabric: Durable Oxford Cloth, Nylon fabric
- Pants Fabric: Nylon Fabric
- Lining: Removable Insulated Lining
- Accessories: High-visibility Reflective Grid, YKK Zipper
- Protection Equipment EU CE Safety Certification

Motorcycle Helmet

MTK-X-SK03

The flip-up police helmet is used for head protection of police officers; it adopts the latest technology shell high-strength material ABS one-time injection molding, with the advantages of light weight, high strength, good comprehensive protection performance and other advantages. Helmet design highlights: flip-up half helmet mask, goggles can be flipped up or folded; mask and goggles can be quickly released and locked; one-handed one-button can easily switch the goggles open and closed, simple and convenient operation; internal pads and ear pads can be replaced, washed, clean and hygienic.



Helmet shell material	impact-resistant high-quality ABS injection molding
Mask, goggles	2MM scratch-resistant polycarbonate material injection molding; goggles are UV-proof
Collision absorption layer	high-density EPS
Wearing system	double-layer 22MM wide nylon chin strap, quick release buckle, 10MM polyester cotton cap top; 2KN stretch is applied after wearing, the buckle is not broken or loose, and can continue to be used
Indirect visibility	Horizontal $\geq 105^\circ$, upper $\geq 7^\circ$, lower $\geq 45^\circ$
Color	black/white
Weight	≤ 1.5 KG

SK-730



Shell	ABS
Surface	Paint
Lens	PC/PET
Weight	1.1kg
Size	One Size XL
Helmet size	31*22*23cm
Number of pins	150pcs*9pcs
Individual packaging size	32*25*25cm
Outer packaging size	101*29*74.5cm*79*34*78cm
Gross weight	17kg*12kg

Motorcycle Helmet

JMK-SK06

The flip-up RCMP helmet is used for RCMP head protection; it uses the latest technology shell and has authoritative international ECE safety certification. The product is made of high-strength material ABS for one-time injection molding, and has the advantages of light weight, high strength, and good comprehensive protection performance.



Highlights of helmet design:

- Flip-up helmet, dual-purpose: fully enclosed, can also be flipped up as a half helmet;
- Goggles can be flipped up or folded up;
- Masks and goggles can be quickly released and locked;
- One-handed one-button can easily switch the goggles open and closed, simple and convenient operation;
- There are ventilation holes on the forehead and back of the head for ventilation;
- The internal padding and ear pads can be removed, washed, and cleaned.

Helmet shell material	impact-resistant high-quality ABS injection molding
Mask, goggles	2MM scratch-resistant polycarbonate material injection molding; goggles are UV-proof
Collision absorption layer	high-density EPS
Wearing system	double-layer 22MM wide nylon chin strap, quick-release buckle, 10MM polyester-cotton cap top; 2KN stretch is applied after wearing, the buckle is not broken or loose, and can continue to be used
Indirect visibility	horizontal $\geq 105^\circ$, upper $\geq 7^\circ$, lower $\geq 45^\circ$
Helmet size	M/L/XL
Color	black/white/customized
Weight	≤ 1.7 KG

Goggles

HMJ-SK02

Goggles have anti-impact and anti-debris functions, can effectively resist these attacks, can protect the user's eyes from damage.

Application scenarios:

Military police shooting training and combat scenes

Technical parameters:

- Frame color: black, khaki, army green
- ultra-light anti-folding TR90 material frame wide Angle design, wide field of vision, reduce eye fatigue;
- 3.1MM impact resistant polycarbonate vinegar lens, high strength anti-impact protection, anti-bullet, fragments, protection below 15 caliber bullets, scattered bullets and fragments;
- Interchangeable lenses, 100%UVA/UVB UV protection, pure transmittance;Black film: anti-glare (used during the day), transparent: dark light protection film (no light source), yellow film: night with enhanced vision at night there is a certain light source;
- Bulletproof, windproof, anti-dust, anti-scratch, anti-ultraviolet, heat insulation, circulation ventilation;
- Anti-impact lens lock, stable lock, fast and convenient disassembly;
- The myopia frame material is PC material, can be arranged according to whether the myopia, the myopia lens needs to be configured in the optical shop, it is recommended to use the myopia degree below 500 degrees, when the myopia lens is less than the correction degree of 25 to 50 degrees will be more comfortable;
- Multi-functional detachable mirror leg, can be equipped with mirror rope to wear firmly when the movement range is large in training;
- Multi-speed adjustable foot, can be adjusted according to different needs
- Adjustable metal memory nose pad ear pads can be removed, washed, and cleaned.



HMJ-SK01B

Goggles have anti-impact and anti-debris functions, can effectively resist these attacks, can protect the user's eyes from damage.

Application scenarios:

Field operation scene

Technical parameters:

- Lens material: polycarbonate fiber;
- lens thickness: $\leq 2.8\text{mm}$;
- bullet-proof performance: at normal temperature, use 18.4mm bullet gun and No. 12 shotgun to bullet-proof performance test the lens, the muzzle distance is 15m from the sample, shoot 1 round, the lens should not break, and can completely block the shrapnel
- anti-ultraviolet performance: colorless transparent lenses require UVA band average transmittance $\leq 0.6\%$, UVB band average transmittance $\leq 0.2\%$; The average transmission ratio of UVA band is $\leq 0.3\%$, and the average transmission ratio of UVB band is $\leq 0.2\%$
- quality: $\leq 120\text{g}$



Reflective Vest



FGY-SK25



FGY-SK02



FGY-04



FGY-SK06



FGY-08



FGY-07

- Material: Quality Nylon
- Color: fluorescein
- Reflective material: 5cm PVC reflective strip. Night reflective distance:300 meters
- Size: suitable for all personnel, can be adjusted by the Velcro at the bottom of the reflective strip

Tactical & Resistant

Tactical Vest



- Place of Origin:CN;ZHE
- Model Number:ZSBX-S-SK-04
- Brand Name:senken
- Color:customized
- Type:Combat/Tactical ballistic vest
- Material:600D Oxford
- Usage:Policemen
- Size:One Size Fits all
- Style:tactical vest
- Application:military/police
- Feature:High Strength
- Protective:need add bulletproof plate
- Pouch:customized



- Place of Origin:CN
- Model Number:ZSBX-S-SK-05
- Brand Name:SENKEN
- Material::Aramid or PE fibre fabric
- Color:Tan, Olive Drab, Blue, Black, Camo
- Design:Basic design of body amour
- Material:600D Oxford
- Usage:Tactical
- Feature:High Strength
- Size:One Size Fits
- Application:Outdoor Gear
- Style:tactical vest

Tactical & Resistant

ZSBX-XJ03A

The net-type MOLLE tactical platform vest is designed for lightweight duty and rapid response. The vest body is made of lightweight nylon net as the main body, and the outer side is designed with MOLLE modularization. The shoulder position adopts a sandwich-type quick-adjustment size design, which adds soft pads to improve the comfort of tactical carrying and the convenience of adjusting tightness. The outer side is equipped with a buckle designed to store communication wires. The waist adopts a quick-adjustment waist seal design, which is simple and bright as a whole. The high utilization rate of MOLLE modules makes it more fit to the human body. At the same time, a tactical accessory bag can be added to the waist—a legging holster and a gas mask.



Features:

- Material: 600D encrypted polyester;
- Size: S-4XL; Waist circumference: 95-120cm;
- Magazine bag suitable for AR, AK, 95, 191 series magazines;
- The back is equipped with an emergency drag handle;

ZSBX-XJ07A

Features:

- Color: Black, Ranger Green, Mud, CP;
- Size: One Size;
- Weight: ≤2.3kg;
- Extendable Waist Size: 130-160CM;



ZSBX-XJ11A

The biggest feature of this combat vest is: single-sided double-layer protective compartment design, one side can be loaded with two protective plates, the protection factor can be enhanced, the size can be adjusted according to the height and body shape of the user, one-line quick release and rescue handle device, can be quickly disassembled and decomposed within one second. The vest surface is fully covered with MOLLE external hanging system, which can carry medical kits and electronic communication equipment.

Features:

- Material: 1000D nylon
- Size: S-4XL, waist circumference 95-125cm
- Weight: 1.49kg (net weight excluding protective plate)



ZSBX-XJ10A

The biggest feature of this combat vest is: the single-sided double-layer protective compartment design can carry two protective plates on one side to enhance the protection factor, and the size can be adjusted according to the height and body shape of the user. At the same time, it can carry ammunition equipment to the maximum extent. It can carry 9 rifle magazines, 6 pistol magazines or carry grenades, tear gas, pepper spray, etc. The surface of the vest is fully covered with MOLLE external hanging system, which can carry medical kits and electronic communication equipment.

Features:

- Material: 1000D nylon
- Size: S-4XL, waist circumference 75-120cm
- Weight: 1.8kg (net weight excluding protective plate)



Stab Resistant Vest FCF-JA-XJ05

- Color:fluorescein
- Main material: 3D three -dimensional mesh clustering fiber is weaved and customized
- Design: The vest adopts a backbone strap vest design, which contains the vest vector, the front and rear protection load board, the side load of the side waist, and each load can be built -in protective layer.
- Protective layer material: high -performance alloy material
- Efficient protective area: $\geq 0.25\text{m}^2$
- Anti-stab chip (excluding waterproof sleeve): $\leq 1.3\text{kg}$
- The vest weight(excluding waterproof layer and accessories): $\leq 1\text{kg}$
- Execution standard:GA68-2019 《Police Stab》 Class A standard



Stab Resistant Vest FCF-JA-SK21

- Color:fluorescein
- Material:high -intensity fast disassembly deduction, 3M high recognition reflective material
- Design:the independent zipper bag design allows users to evaluate according to the risk of the task and adopt a separate bombist -proof version of the portable mode.
- Protective layer material:high-performance alloy material
- Efficient protective area: $\geq 0.25\text{m}^2$
- Anti-stab chip(excluding waterproof sleeve): $\leq 1.5\text{kg}$
- The vest weight(excluding waterproof layer and accessories): $\leq 1.7\text{kg}$
- Total weight: $\leq 3.2\text{kg}$
- Anti-stab chip thickness: $\leq 9\text{mm}$
- Visual reflective area: $\geq 0.1\text{m}^2$
- Execution standard:GA68-2019 《Police Stab》 Class A standard





Stab Resistant Vest

FCF-JA-SK03

- Color: Fluorescent yellow
- Stab-resistant layer material: Specialized metal material
- Effective protection area: $\geq 0.25\text{m}$
- Stab-resistant plate (excluding waterproof cover): $\leq 1.5\text{kg}$
- Weight of the vest (excluding protective layers and accessories): $\leq 1.2\text{kg}$
- Emergency pull straps on the back
- MOLLE system
- The main body of the vest is equipped with detachable reflective grids, allowing for color alternation based on mission requirements.

FCF-FB-SK01

- Weight: $\leq 2.0\text{kg}$
- Material: Aluminum Alloy.
- Color: black, Multi Cam camouflage, dark blue also customized colors
- Outside cover: nylon oxford
- Flexibility: Easy to wear and take off
- Stab-resistant properties: Can bear 24J puncture kinetic energy
- Acclimatization Temperature: $-20^{\circ}\text{C}\sim+55^{\circ}\text{C}$



Quickly remove stab-resistant clothing

FCF-JA-XJ07Z

Introduction:


Stab-resistant clothing consists of a stab-resistant jacket, stab-resistant layer, and protective cover for the stab-resistant layer. The material of the stab-resistant clothing is non-toxic and does not cause any natural harm to the human body. After wearing it, it does not restrict the free movement of the arms or the body's movements such as kneeling, jumping, squatting, bending, and twisting.

Features:

- Ergonomic design and laser cutting technology for quick wearing and integration.
- The jacket is made of stain-resistant, splash-proof, durable, and breathable fabric.
- Deformation control technology is used for the size of the protective base plate.

Specifications:

- Vest fabric: 500D Cordura
- The chest is designed with attachment points for law enforcement recorders, walkie-talkies, and other accessories. The sides of the waistband feature Velcro design, allowing users to add additional pouches as needed
- The front of the vest has attachment points for the Dp series duty panels
- Large areas on the front and back of the vest feature laser-cut Velcro for easy attachment of identification patches and morale patches
- Stab-resistant material: high-performance alloy material
- Stab-resistant panel thickness: $< 8.5\text{mm}$
- Stab-resistant panel weight: $< 1.6\text{kg}$

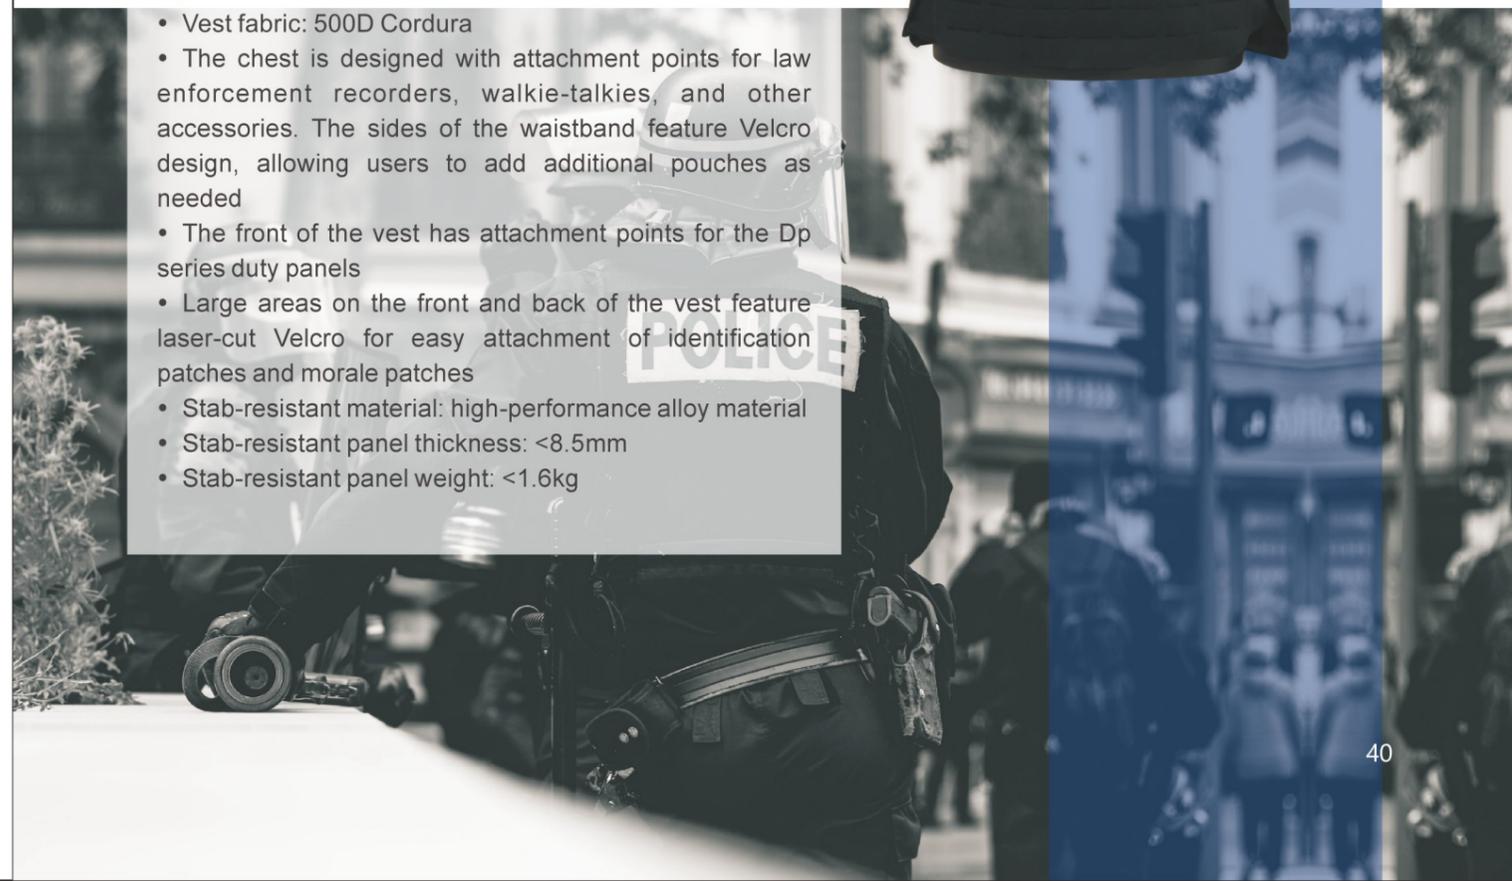

Cut Resistant Equipment

CUT RESISTANT SHIRT

Property	Description
Fabric material	100% Cut-Tex® PRO slash-resistant fabric
Cut resistance	Resistant to cutting force of 27.8 Newtons
Tear strength	Resistant to tearing force of 398.5 Newtons
Abrasion resistance	No holes after 8000 cycles of abrasion
Flame resistance	Not flame retardant, but can be made flame retardant by using high-quality flame-retardant agents/sprays
Care instructions	Do not dry clean, tumble dry, iron, use fabric softener or bleach. Machine wash below 40°C



NECK GUARD

Property	Material
Composition	Cut-Tex® PRO cut-resistant fiber
Color	Medium gray with black breathable mesh
Appearance	Lightweight and low-profile
Texture	Soft and comfortable
Protection	Provides certain protection to the wearer's neck
Toxicity	Non-toxic outer layer, doesn't cause skin discomfort
Cut resistance	Can withstand a cutting force of 27.8 Newtons
Tear resistance	Can withstand a tearing force of 398.5 Newtons
Abrasion resistance	No holes appeared after 8000 abrasion cycles



Anti-cutting glove

- The glove core is made of ultra-high molecular polyethylene fiber coated yarn, which can reach the level of D cutting resistance.
- Encryption knitting, light and soft feel, so that the product has excellent flexibility and adhesion.
- Palm surface nitrile rubber coating, using flushing foaming process, no slag no taste, with wear-resistant, non-slip, breathable function.
- Ergonomic design, fit the palm, does not affect the joint bending, flexible operation.



LONG-ARMS GUARD PGHB-SK02



ARMS GUARD FGHB-SK01



Feature	Description
Colors	Silver-gray and black
Fabric	100% Cut-Tex® PRO cut-resistant fabric
Cut resistance	Withstands blade cut force of 27.8 newtons, meets European Level 5 standards
Tear resistance	Withstands tearing force of 398.5 newtons, meets European Level 4 standards
Abrasion resistance	Endures 8000 rubs without penetration, meets European Level 4 standards
Care instructions	Do not dry clean, tumble dry, iron, use fabric softener, bleach etc. Machine wash below 40°C

CUT RESISTANT PANTS

Property	Description
Fabric material	100% Cut-Tex® PRO slash-resistant fabric
Cut resistance	Resistant to cutting force of 27.8 Newtons
Tear strength	Resistant to tearing force of 398.5 Newtons
Abrasion resistance	No holes after 8000 cycles of abrasion
Flame resistance	Not flame retardant, but can be made flame retardant by using high-quality flame-retardant agents/sprays
Care instructions	Do not dry clean, tumble dry, iron, use fabric softener or bleach. Machine wash below 40°C



Elbow and knee pads



Gas Mask

FDMJ-SK04

Features	Specifications
Protection Time	TF-10D filtering gas mask can use different types of filters based on the protection object, and the protection time depends on the performance of the selected filter.
Exhalation Resistance	≤100Pa (30L/min)
Inhalation Resistance	≤40Pa (30L/min)
Field of View	Total field of view: ≥70% Binocular field of view: ≥55% Lower field of view: ≥35 degrees
Mask Leakage Rate	≤0.05%
Exhalation Valve Air Tightness	When the exhalation valve is depressurized to -1180Pa, the negative pressure Specification should not drop more than 500Pa within 45s.
Storage Life	5 years.



TF-4D

Features	Specifications
Protection Object	Hydrogen cyanide
Protection Time	≥30min (30L/min, 1.5mg/L, 80-80% RH)
Exhalation Resistance	≤100Pa (30L/min)
Inhalation Resistance	≤186Pa (30L/min)
Field of View	Total Field of View: ≥70% Dual Eye Field of View: ≥60% Lower Field of View: ≥40°
Mask Leakage Rate	≤0.05%
Power Supply	Nominal 3.7V rechargeable lithium battery
Working Mode	VOX (sound-triggered)
Storage Period	5 years



Tactical Assault Backpack BB-XJ12

Lightweight material combined with large capacity, multifunctional and reasonable compartment bags, built-in separate compartments, can easily hold a 15-inch laptop or medical tool box, etc. Ergonomic shoulder straps, designed for comfortable and decompressed carrying. It also has a honeycomb air diversion carrying system based on wear-resistant fabrics, which is not only comfortable to carry, but also breathable and wear-resistant.



Parameters:

- Specifications: L31" x W 23" x H41 (48.3x12.7x35.6cm)
- Weight: 1.3kg
- Capacity: 42L



BB-XJ13W



BB-XJ14W



BB-XJ12W



BB-XJ15W



BB-XJ17W



BB-XJ16W



Multi-light source identification light


Product introduction

Multi-light source grouping identification light is a light source with beacon stroboscopic function used in military police training and actual combat operations

Use scenario

- In the low light and high pressure combat environment, the special police members play the role of marking the members and quickly identifying each other's position and distance during the task.
- The second scene is the group formation of the riot squad, which can be quickly distinguished by the formation identification light.
- The daily patrol law enforcement scene can act as a service identification light through the red and blue flashing mode of the marshals.
- In addition, in airborne parachuting, helicopter landing and other combat environments, formation identification lights can also play a role in personnel positioning

Appearance	triangular prism
Color	black + transparent frosted cover
Weight	≤50g
Size	diameter φ44mm thickness 17.5
Protection level	Ip67
Battery life (unit: h/ hour)	1) Single-machine mode ≥40h 2) Networking mode ≥10h
Structure	front button, back waterproof charging port
High and low temperature performance	-30~50°C
Flashing frequency	30/60 times per minute
Power supply	built-in rechargeable lithium battery
Fall protection	≥1m
Wireless frequency function	When the two adjacent devices are turned on and in the same mode, the device automatically blinks at the same frequency, and when the mode is switched, the device in the same frequency automatically is in its mode
Networking distance	≤15m

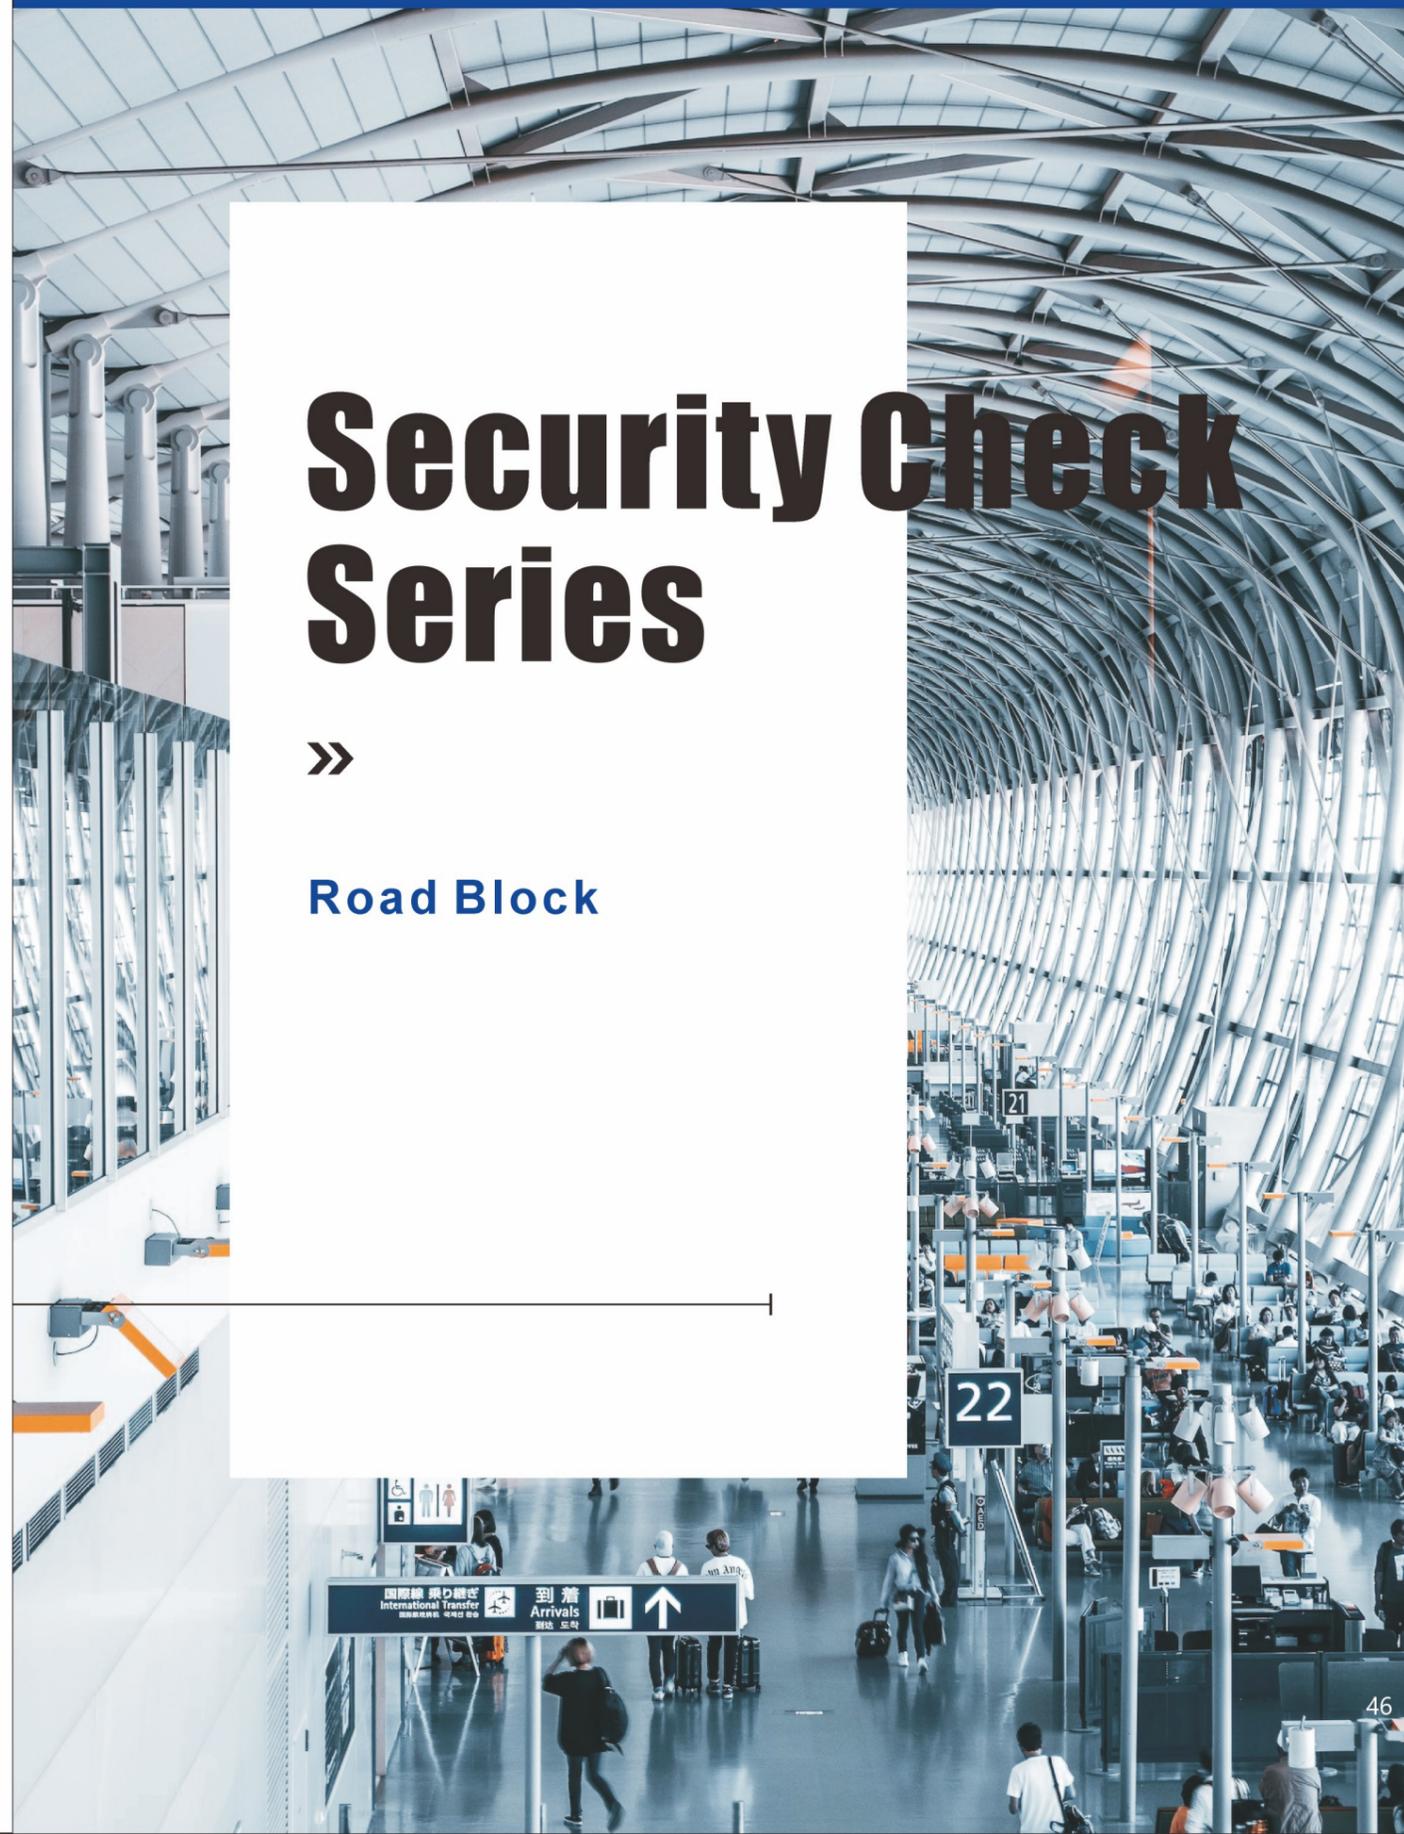

Security Check Series



Road Block

Road Block

LZ-J-XJ02 Side-open Road Block

- Structure and Material: Plastic base and metal spikes, manually expand and close
- Effective length after stretch: $\geq 5.2\text{m}$
- Effective length of spikes: $\geq 37\text{mm}$
- Space between spikes: $\geq 33\text{mm}$
- Effective intercept time: 30s
- Weight: $\leq 9.34\text{kg}$ (Including case, but excluding accessories and tools)
- Main features:



- The spikes of the roadblock shall bear the tension of 30N in the axial direction and shall fall off immediately when the tension of 100N is applied
 - When the ambient temperature is $-40^{\circ}\text{C} \sim +55^{\circ}\text{C}$, no corrosion and mechanical damage shall be found on the roadblock surface, the stretch time should not be more than 1min, and the closing time should not be more than 1min
- Meet GA/T421 "roadblock product technical standard"

Effective length	Effective interception time	Stretch time	Weight(kg)
8m	8m	< 1min	≤ 9.7

LZ-D-SK01 Remote Control Road Block

- Composition: traction device, spike strips, equipment box, DC12V battery pack (rechargeable), remote control transmitter
- Dimension: 55cm*42.5cm*9cm
- Battery: NI-MH battery 3000mAh, voltage: 12V
- Stretch time: < 7s
- Load-bearing: 20 tons
- Thickness of punctured tyre: $\leq 35\text{mm}$
- Layout length: free within 7m
- Remote control distance: 50m
- Main specifications:
- Structure and Material: Plastic base and metal spikes
- Effective length of road block after stretch: 5.7m
- Effective length of spike: 35mm
- Space between spikes: 74mm
- Effective intercept time: 30s



Effective length	Effective interception time	Stretch time	Remote distance	Weight(kg)
8m	7m	< 7s	$\geq 50\text{m}$	0.29

ISO 14001



Certificate of Environment Management System

Certificate No.: 10118E22726R1M

Awarded to

Senken Group co., LTD.

Organization Code Certificate No.: Unified Social Credit Code:91330004311451831K
 Add.No.160 west Yuelu street, Wuxi city, Jiangsu province, China 322616

Beijing ZhongLianTianRun Certification Center(ZLTR) certify that the Environment Management System of the above organization has been assessed and found to be in accordance with the requirements of the standard:

GB/T24001-2016 / ISO14001:2015

SCOPE OF CERTIFICATION/REGISTRATION

the environmental management activities involved by The design,production,sales and services of police equipments (including car mobile and permanent fixed warning lights,sirens,spakers, YNP series portable LED information screen for road traffic, police and security equipment, intelligent transportation equipment, police lighting products and equipment, electroacoustic products and equipment, police lighting products, police shoes and hats, police clothing, police bags, police helmets,protective equipment,counterterrorism equipment,investigation and evidence collection ,audio and video forensics equipment,leather gloves)and remote directional acoustic dispersion device, firejacket;The design,production, sales and services of single police law enforcement audio recording system and fire mobile illuminating device which was within the scope of CCC regulations;software development and system integration and sites

This certificate is made valid when used with certification scopes and the requirements of applicable laws and regulations. These requirements include, but are not limited to, administrative permits, scopes of qualifications, and CCC requirements.

Subject to operation conditions in requirements conformity with Environment Management System, This Certificate is valid for a period of three years only.

Date From: Aug 3rd,2018 To: Aug 2nd,2021

Initial Date Of Certificate Issued: Jan 27th,2016

Renewal Date:May 31st,2019

The effectiveness of this Certificate shall be Validated by periodic surveillance audit of ZLTR for maintenance. Information of this certificate can be found on the official website of Beijing Zhonglian Tianrun Certification Center (http://www.zltr.com.cn)

ISO 14001





Beijing Zhongliantianrun Certification Center

Head Office: 22nd Floor, 2nd Unit, Block 1, No.4 Yuelu, Qingpu Road, Chongqing District, Beijing, P.R. China 100022

ISO 9001



Certificate of Approval

Certificate No.: 10118Q1676R1M

Awarded to

Senken Group co., LTD.

Organization Code Certificate No.: Unified Social Credit Code:91330004311451831K
 Add.No.160 west Yuelu street, Wuxi city, Jiangsu province, China 322616

Beijing ZhongLianTianRun Certification Center (ZLTR) certify that the Quality Management System of the above organization has been assessed and found to be in accordance with the requirements of the standard:

GB/T19001-2016 / ISO9001:2015

SCOPE OF CERTIFICATION/REGISTRATION

The design,production,sales and services of police equipments (including car mobile and permanent fixed warning lights,sirens,spakers, YNP series portable LED information screen for road traffic, police and security equipment, intelligent transportation equipment, police lighting products and equipment, electroacoustic products and equipment, police lighting products, police shoes and hats, police clothing, police bags, police helmets,protective equipment,counterterrorism equipment,investigation and evidence collection ,audio and video forensics equipment,leather gloves)and remote directional acoustic dispersion device, firejacket;The design,production, sales and services of single police law enforcement audio recording system and fire mobile illuminating device which was within the scope of CCC regulations;software development and system integration

This certificate is made valid when used with certification scopes and the requirements of applicable laws and regulations. These requirements include, but are not limited to, administrative permits, scopes of qualifications, and CCC requirements.

Subject to operation conditions in requirements conformity with Quality Management System, This Certificate is valid for a period of three years only.

Date From: Aug 3rd,2018 To: Aug 2nd,2021

Initial Date Of Certificate Issued: Jan 27th,2016

Renewal Date:May 31st,2019

The effectiveness of this Certificate shall be Validated by periodic surveillance audit of ZLTR for maintenance. Information of this certificate can be found on the official website of Beijing Zhonglian Tianrun Certification Center (http://www.zltr.com.cn)

ISO 9001





Beijing Zhongliantianrun Certification Center

Head Office: 22nd Floor, 2nd Unit, Block 1, No.4 Yuelu, Qingpu Road, Chongqing District, Beijing, P.R. China 100022

OHSAS 18001



Certificate of Occupational Health and Safety Management

Certificate No.: 10118S12192R1M

Awarded to

Senken Group co., LTD.

Organization Code Certificate No.: Unified Social Credit Code:91330004311451831K
 Add.No.160 west Yuelu street, Wuxi city, Jiangsu province, China 322616

Beijing ZhongLianTianRun Certification Center(ZLTR) certify that the Occupational health and safety Management System of the above organization assessed and found to be in accordance with the requirements of the standard:

GB/T28001-2011 /OHSAS 18001:2007

SCOPE OF CERTIFICATION/REGISTRATION

the occupational health and safety management activities involved by The design,production,sales and services of police equipments (including car mobile and permanent fixed warning lights,sirens,spakers, YNP series portable LED information screen for road traffic, police and security equipment, intelligent transportation equipment, police lighting products and equipment, electroacoustic products and equipment, police lighting products, police shoes and hats, police clothing, police bags, police helmets,protective equipment,counterterrorism equipment,investigation and evidence collection ,audio and video forensics equipment,leather gloves)and remote directional acoustic dispersion device, firejacket;The design,production, sales and services of single police law enforcement audio recording system and fire mobile illuminating device which was within the scope of CCC regulations;software development and system integration and sites

This certificate is made valid when used with certification scopes and the requirements of applicable laws and regulations. These requirements include, but are not limited to, administrative permits, scopes of qualifications, and CCC requirements.

Subject to operation conditions in requirements conformity with Occupational health and safety Management System, This Certificate is valid for a period of three years only.

Date From: Aug 3rd,2018 To: Mar 11th,2021

Initial Date Of Certificate Issued: Aug 4th,2015

Renewal Date:May 31st,2019

The effectiveness of this Certificate shall be Validated by periodic surveillance audit of ZLTR for maintenance. Information of this certificate can be found on the official website of Beijing Zhonglian Tianrun Certification Center (http://www.zltr.com.cn)

OHSAS 18001





Beijing Zhongliantianrun Certification Center

Head Office: 22nd Floor, 2nd Unit, Block 1, No.4 Yuelu, Qingpu Road, Chongqing District, Beijing, P.R. China 100022

TAP



Certificate of Approval

Certificate No.: 10118Q1676R1M

Awarded to

Senken Group co., LTD.

Organization Code Certificate No.: Unified Social Credit Code:91330004311451831K
 Add.No.160 west Yuelu street, Wuxi city, Jiangsu province, China 322616

Beijing ZhongLianTianRun Certification Center (ZLTR) certify that the Quality Management System of the above organization has been assessed and found to be in accordance with the requirements of the standard:

GB/T19001-2016 / ISO9001:2015

SCOPE OF CERTIFICATION/REGISTRATION

The design,production,sales and services of police equipments (including car mobile and permanent fixed warning lights,sirens,spakers, YNP series portable LED information screen for road traffic, police and security equipment, intelligent transportation equipment, police lighting products and equipment, electroacoustic products and equipment, police lighting products, police shoes and hats, police clothing, police bags, police helmets,protective equipment,counterterrorism equipment,investigation and evidence collection ,audio and video forensics equipment,leather gloves)and remote directional acoustic dispersion device, firejacket;The design,production, sales and services of single police law enforcement audio recording system and fire mobile illuminating device which was within the scope of CCC regulations;software development and system integration

This certificate is made valid when used with certification scopes and the requirements of applicable laws and regulations. These requirements include, but are not limited to, administrative permits, scopes of qualifications, and CCC requirements.

Subject to operation conditions in requirements conformity with Quality Management System, This Certificate is valid for a period of three years only.

Date From: Aug 3rd,2018 To: Aug 2nd,2021

Initial Date Of Certificate Issued: Jan 27th,2016

Renewal Date:May 31st,2019

The effectiveness of this Certificate shall be Validated by periodic surveillance audit of ZLTR for maintenance. Information of this certificate can be found on the official website of Beijing Zhonglian Tianrun Certification Center (http://www.zltr.com.cn)

TAP





Beijing Zhongliantianrun Certification Center

Head Office: 22nd Floor, 2nd Unit, Block 1, No.4 Yuelu, Qingpu Road, Chongqing District, Beijing, P.R. China 100022

